

Unmanned Aircraft Systems Data Post-Processing

Structure-from-Motion Photogrammetry

Section 1 – Digital Single-Lens Reflex (DSLR) Imagery

Synopsis

In this introductory training class, we will explore how to utilize image data captured from an unmanned aerial vehicle equipped with an on-board camera or sensor. Utilizing Computer Vision – Structure-from-Motion (Photogrammetry) techniques that estimates three-dimensional information from two-dimensional images. Using real world data captured from a UAS, we will illustrate how it is possible to generate georeferenced point clouds, digital surface elevation models and mosaiced image bases for mapping and geographic information system data layer creation.

Requirements

- Computer (desktop or laptop) with at least 8GB RAM
- A registered version of Agisoft PhotoScan Version 1.2.6 (Build 2834)
- Access the data files noted below
- No previous experience with PhotoScan is necessary

Workflow

The following step-by-step instructions are intended to familiarize participants with the relevant components of PhotoScan. A short description is given, followed by a specific “cookbook” of instructions for how to process a dataset from beginning to end.

Data

A real world dataset is provided for the exercise to see how actual collected data is processed into workable GIS data layers.

Class Outline

- Import images collected from a UAS
- Align the images
- Create a sparse point cloud from the images
- Reduce and adjust errors in the data
- Create a dense point cloud
- Create a mesh or digital surface model
- Create image texture
- Create products
- Output the products for use in GIS


UAS DSLR image captures to mosaic and rectify using Agisoft PhotoScan

Agisoft PhotoScan Version 1.2.6 (Build 2834 – 64bit)


Note: Arrange the Agisoft PhotoScan ‘Panels’ the way you prefer to work by dragging and docking.

1.) Adding Photos

Procedure Description: Images are loaded to begin the mosaic and rectification process. Images that contain GPS embedded coordinate data available directly from the camera or captured from the UAS, allows for initial referencing of the images to the ground. Images can be from different flights, altitudes and folders with standard image formats supported such as .jpg, .png, .tif, etc.



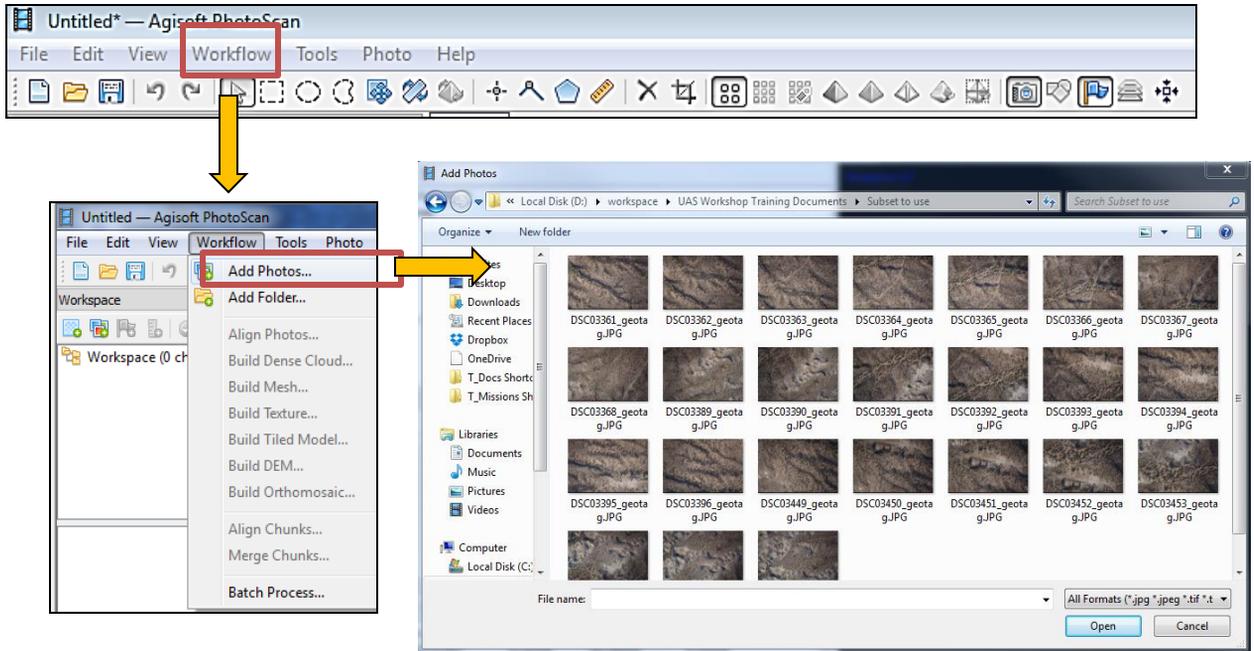


- Once photos are added, they will appear as a ‘Chunk’ in the Workspace panel with the number of photos that were added. Thumbnails of the photos will appear in the Photos panel.

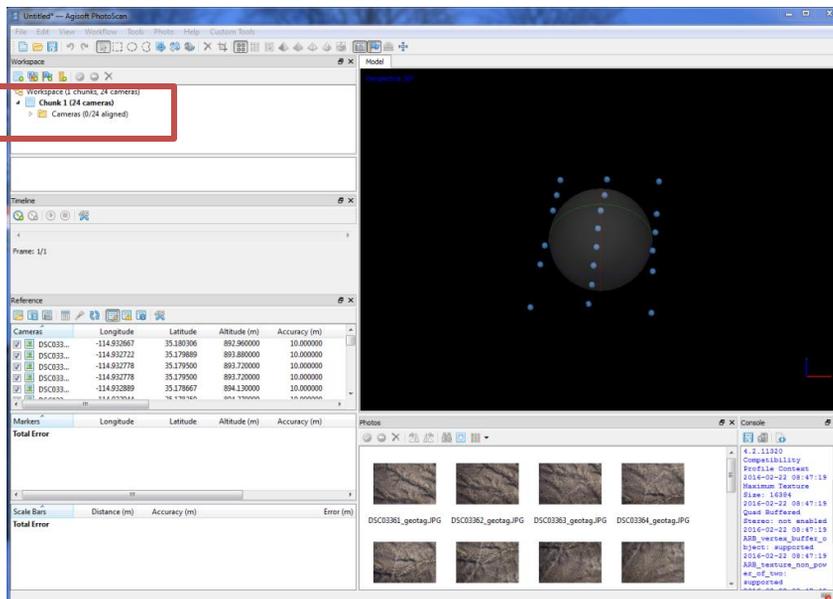


Setting the Coordinate System for Image Referencing

- On the 'Reference' panel ... Select the 'Settings' icon  ... check to make sure the coordinate system is set to what the camera or UAS GPS was using while collecting the photos (i.e. Geographic Coordinate System, WGS84). **Note:** Keep the accuracy settings to the default values at this point in the exercise.

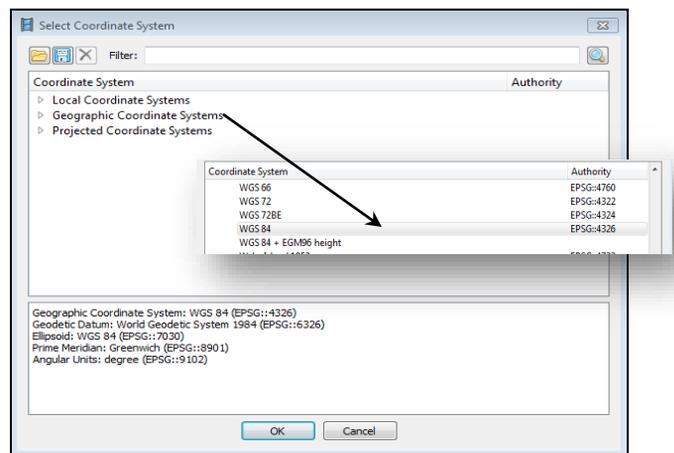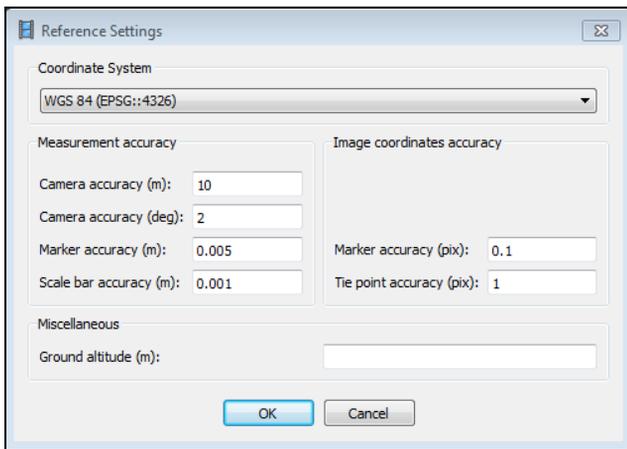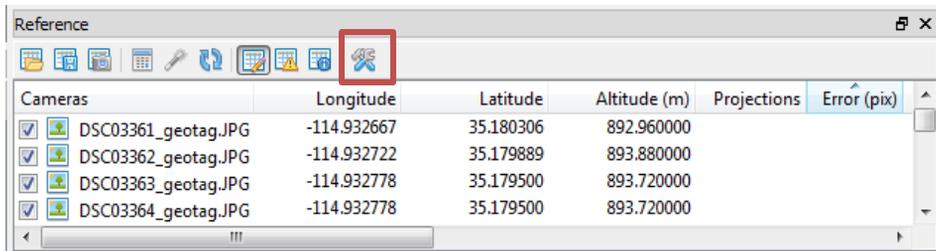


Checking the Camera Calibration

- Select Tools from the main menu...Camera Calibration
- Basic information is extracted from the EXIF (image header info) such as pixel size, focal length, time stamp, etc. (ie. Sony ILCE-5100).

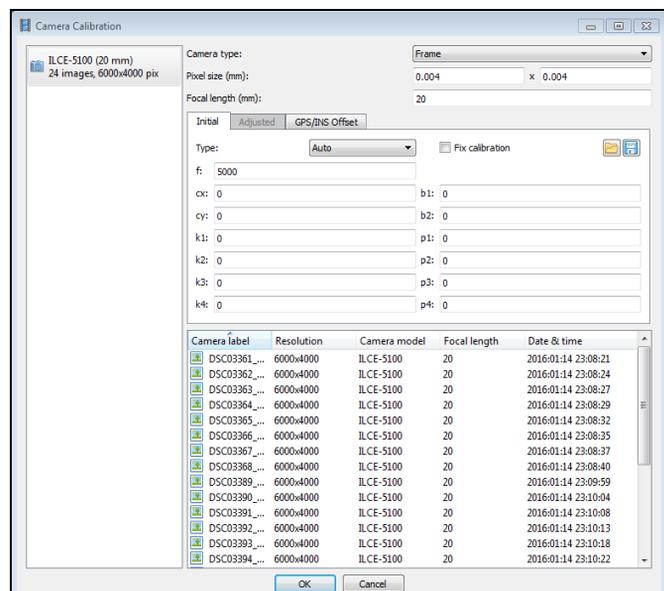


Optional: check the quality of your images.

If you have taken excess photos, you may be able to sort through them and remove lower quality ones to produce a better model. PhotoScan is able to perform an automated image quality assessment to identify blurry photos. First, right click on any photo and choose “Estimate Image Quality...”. Then choose to Apply to “All cameras”. Click OK.

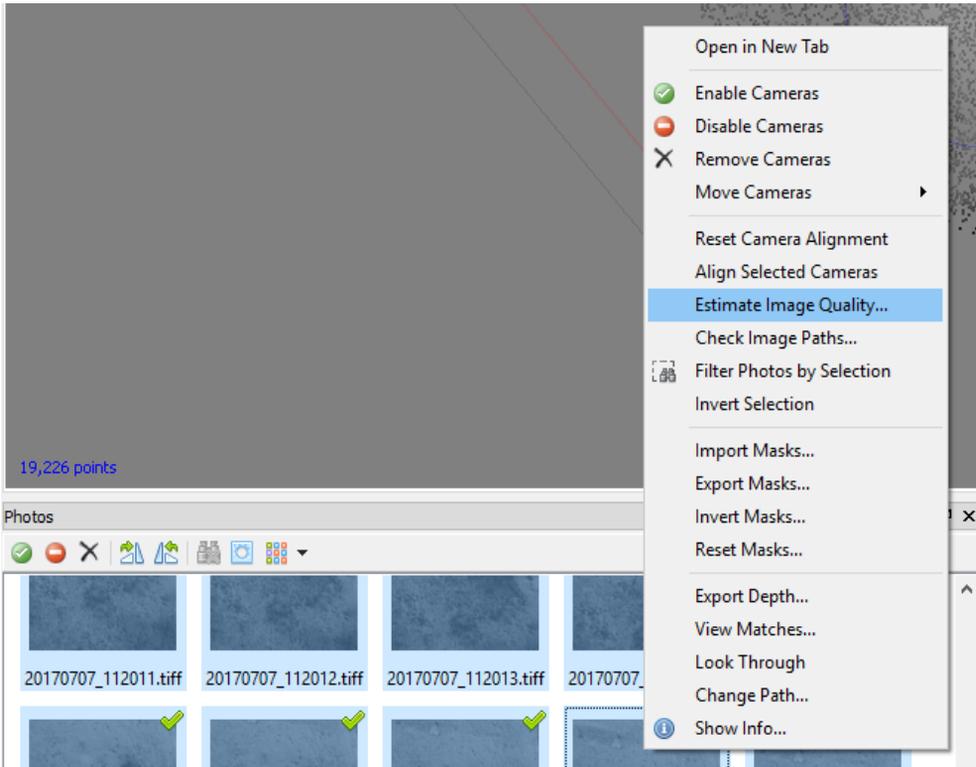

Choose to see camera details and there will now be values under the “Quality” column. An image quality of 1 is the best, but anything less than 0.7 should be replaced with a better quality image or removed if enough overlap with other photos allows.

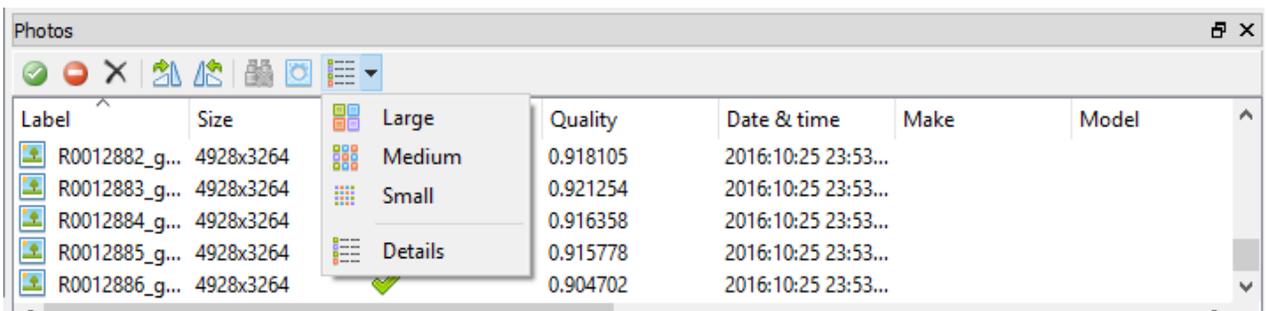


2.) Aligning Photos

Procedure Description: To begin the photo alignment process, three or four steps are performed to tie the images together in an automated image correlation process in order to create a sparse point cloud. This initial phase can also be used to select the best images to use for the model.


Note: Bad images can initially be removed before running the align photo process by selecting them, right clicking and removing the cameras. This can save considerable time in the alignment process.

- Workflow... Align Photos...
- Settings:
 - Accuracy : highest = full image resolution lowest = down sampled resolution
 - Pair preselection : use generic or disabled if image locations are not known
use reference if images have known reference info in EXIF or log file
 - Advanced:
 - Key point limit (points of interest) = 60000
 - Tie point limit (points matched on 2 or more photos) = 0
(zero is recommended to keep all matched points)

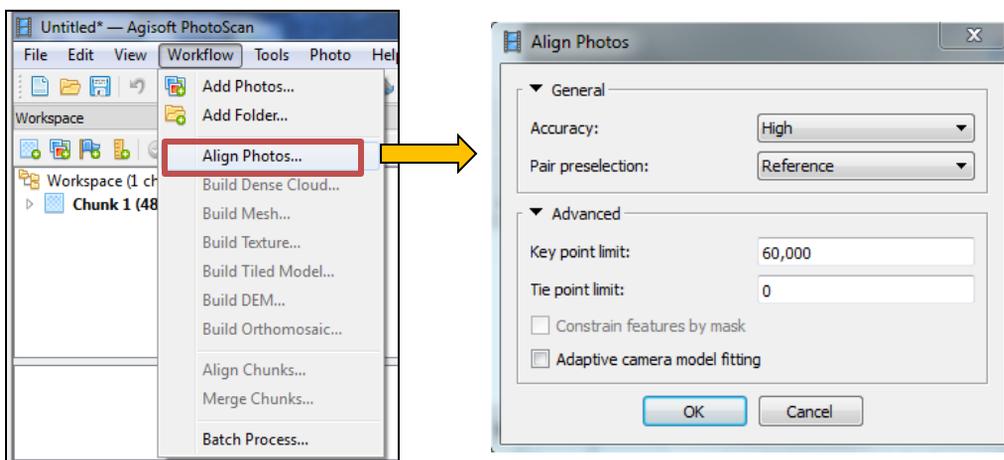

- PhotoScan processes four steps in order to create a sparse point cloud:
 - 1.) Detecting points
 - 2.) Selecting pairs
 - 3.) Matching points
 - 4.) Est. camera locations

Note: Only 3 steps will be performed if Pair preselection: Disabled

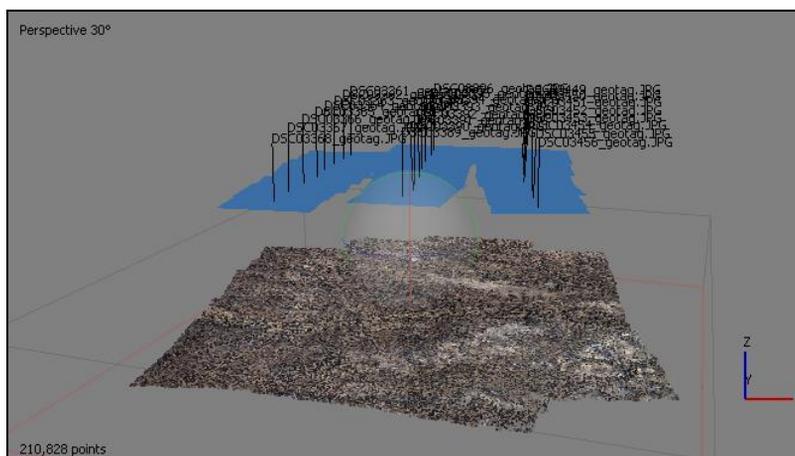


3.) Optimizing the Photo Alignment


Procedure Description: Optimization is performing a photogrammetric least squares bundle adjustment. It is estimating the internal and external camera orientations and measurements and corrects for the camera lens distortions.

Optimizing the Photo Alignment

On the 'Reference' panel ... Select the 'Settings' icon  ... (use settings below if it does not default to these values).

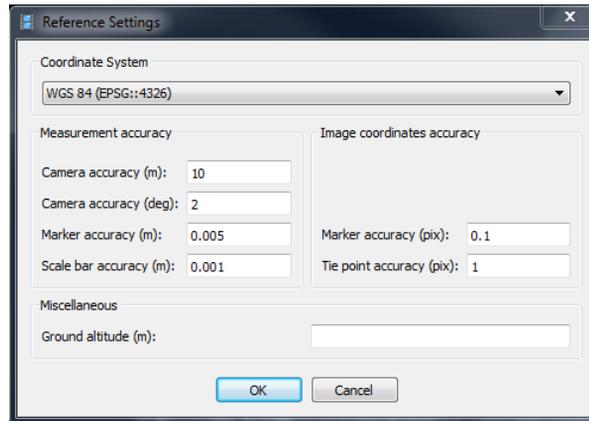

- Select the Optimize Cameras either from the 'Tools' tab on the 'Main Menu' or from the icon on the 'Reference' panel  Use the default values or check parameters as shown below (Check Fit: f, cx cy, k1, k2, k3, p1, p2) ... OK

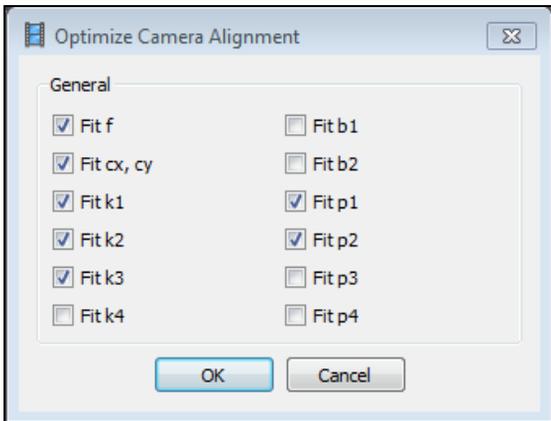

Camera Alignment Value Definitions:

f - camera focal length (x,y)
 cx, cy - center of camera sensor or principal point (x,y)
 k values - distortions from center of the lens (radial distortions)
 p values - lens misalignments (tangential distortions)
 b values - values that compensate for non-square pixels

- After Optimizing, check the 'Console' window and look for the Standard Error of Unit Weight (SEUW). The xxxxxx's indicate the number of adjustment iterations. This is followed by a beginning and ending SEUW value. It is also good to start monitoring the Projections and Error (pix) columns in the Reference Panel. A good guideline is to not let the Projections (number of points on each photo) go below 100. The goal for pixel error is .3

```
2017-03-17 12:07:08 Optimizing camera
locations...
2017-03-17 12:07:09 adjusting:
xxxxxxxx 0.110963 -> 0.110954
2017-03-17 12:07:21 coordinates applied
in 0 sec
2017-03-17 12:07:21 Finished processing
in 12.856 sec (exit code 1)
```

Cameras	Projections	Error (pix)	Error (m)
<input checked="" type="checkbox"/> DSC03393_geotag.JPG	24807	0.883	12.498443
<input checked="" type="checkbox"/> DSC03396_geotag.JPG	17528	0.861	11.492616
<input checked="" type="checkbox"/> DSC03392_geotag.JPG	26642	0.846	13.411317
<input checked="" type="checkbox"/> DSC03394_geotag.JPG	25653	0.838	11.268666
<input checked="" type="checkbox"/> DSC03395_geotag.JPG	24191	0.827	11.983657


4.) Error Reduction - Gradual Selection

Procedure Description: In order to reduce the errors in the adjustment, the Gradual Selection procedure will be used several times in order to improve the geometry of the overall model. Three steps are used and repeated as necessary to reduce the errors as much as possible:

1. Reconstruction Uncertainty ----- removing bad points due to poor geometry
2. Projection Accuracy ----- removing bad points due to pixel matching errors
3. Reprojection Error ----- removing bad points due to pixel residual errors

Reconstruction Uncertainty (Geometry)


- Select 'Edit' from the main menu...Gradual Selection...Reconstruction uncertainty (from the pulldown menu)... the goal is to reach a Level = 10 or lower (type in the value of 10 or use the slider bar to reach close to that level). If too many points are selected this may not be possible (below 50 is highly recommended)...OK.

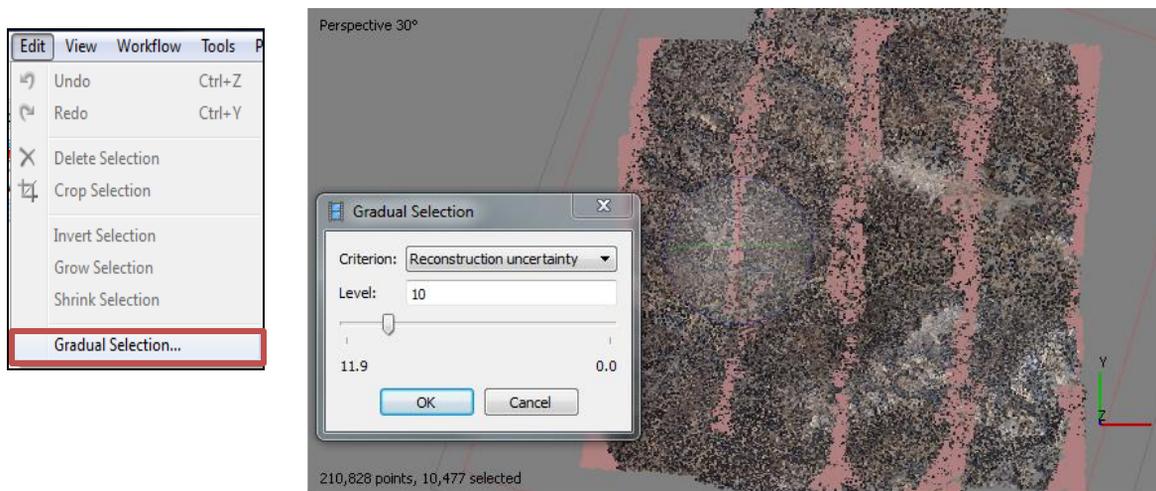

Reason for Level Criteria:

- Level of 10 is approximately equal to a good Base to Height ratio of 1:2.3
- Level of 15 is approximately equal to an acceptable Base to Height ratio of 1: 5.5



- Selected points will show up as pink. To delete those points, select the  from the main menu. After deleting points, another optimization is needed. Select the optimize icon from the Reference panel  Use the same setting as before: (Check Fit: f, cx cy, k1, k2, k3, p1, p2)...OK

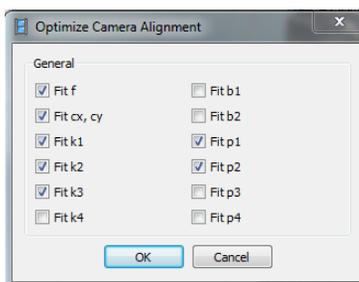

- The Reconstruction uncertainty procedure should be run 2 times. Continue to monitor the Projections, Error (pix).

Projection Accuracy (Pixel Matching Errors)


- Select 'Edit' from the main menu...Gradual Selection...Projection accuracy (from the pulldown menu)... the goal is to reach a Level = 2-3... OK. (Note: If not possible, only go to a level of about 50% of the points selected.)

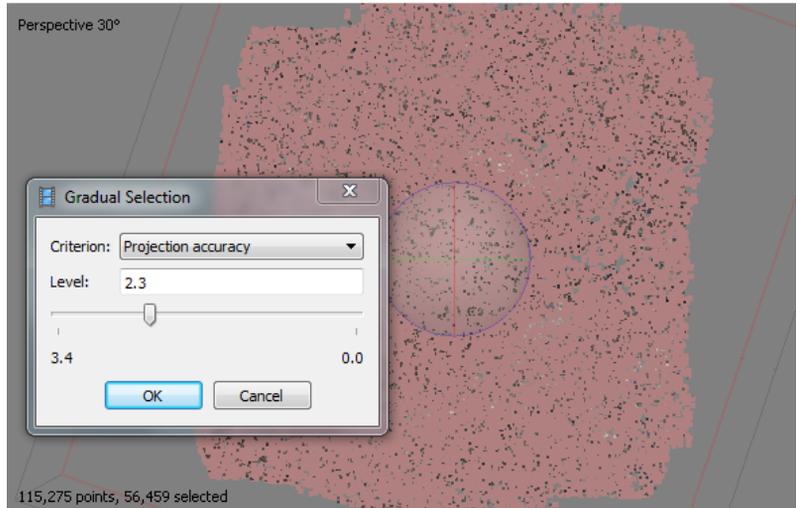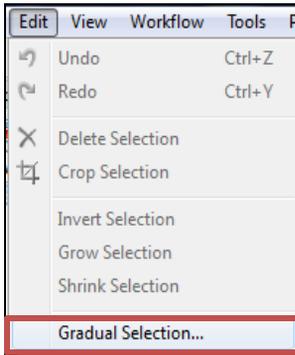


- Selected points will show up as pink. To delete those points, select the from the main menu. After deleting points, another optimization is needed. Select the optimize icon from the Reference panel Use the same setting as before: (Check Fit: f, cx cy, k1, k2, k3, p1, p2)...OK

Reason for Level Criteria:

- Level of 1 is a statistically weighted value that equates to a very high quality match coming from crisp and clear images.
- Values of 2-3 are acceptable and 3 may be the best that can be achieved from non-metrically engineered consumer (or UAS) type cameras.

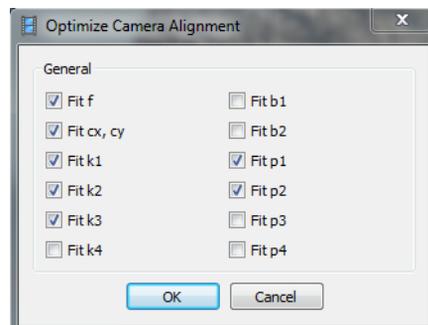

- Continue to check the SEUW in the Console pane, overall pixel error and number of projections after running the Optimization. Your overall pixel error should start coming down. SEUW may change and can actually increase and number of projections should decrease as points are deleted.



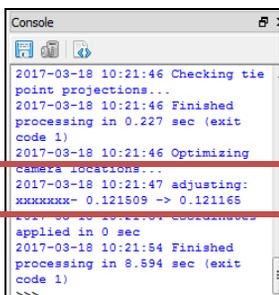


Cameras	Projections	Error (pix)	Longitude	Latitude
<input checked="" type="checkbox"/> DSC03361_geotag.JPG	7044	0.524	-114.932667	35.180306
<input checked="" type="checkbox"/> DSC03449_geotag.JPG	7338	0.500	-114.930500	35.180250
<input checked="" type="checkbox"/> DSC03396_geotag.JPG	7366	0.546	-114.931639	35.180306
<input checked="" type="checkbox"/> DSC03452_geotag.JPG	8642	0.573	-114.930667	35.179000

- The Project Accuracy procedure should be run until you reach Projection Accuracy = 2, and no more points are selected.


Tie Point Accuracy

- The tie point accuracy can now also be tightened. Select the  icon from the Reference Panel, and enter the desired tie point accuracy value. Use .1 if the images are very clear, .3 – 1.0 if they are not as crisp.
- Select the optimize icon  from the Reference panel and check all the remaining distortion parameters...OK. **Note:** By tightening the tie point accuracy, the SEUW should get closer to the desired value of 1.0 as seen in the Console pane (may exceed 1.0)

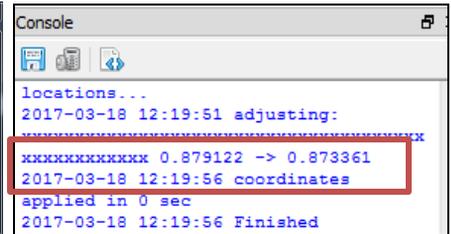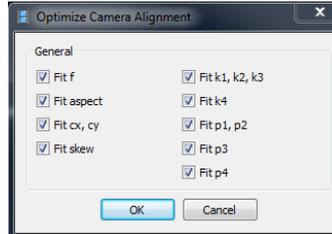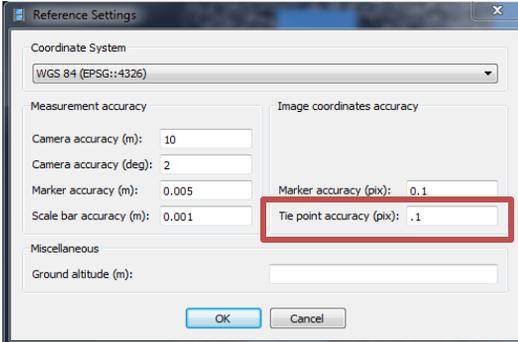


Positional Error

- Continue to also monitor the overall positional error. It may be necessary to uncheck images so they are not used in the positional accuracy adjustment. By unchecking, the images are still used but the positional data is not. Errors can be found in the collected images due to wind conditions, lapse in the GPS recorded, angle or many other factors.

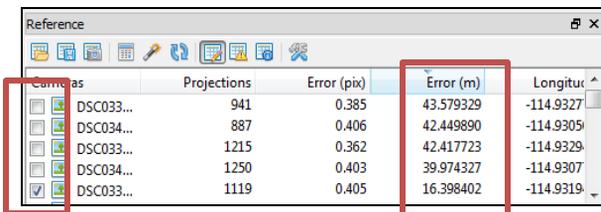

Cameras	Projections	Error (pix)	Error (m)	Longitude
<input type="checkbox"/> DSC033...	941	0.385	43.579329	-114.9327
<input type="checkbox"/> DSC034...	887	0.406	42.449890	-114.9305
<input type="checkbox"/> DSC033...	1215	0.362	42.417723	-114.9329
<input type="checkbox"/> DSC034...	1250	0.403	39.974327	-114.9307
<input checked="" type="checkbox"/> DSC033...	1119	0.405	16.398402	-114.9319

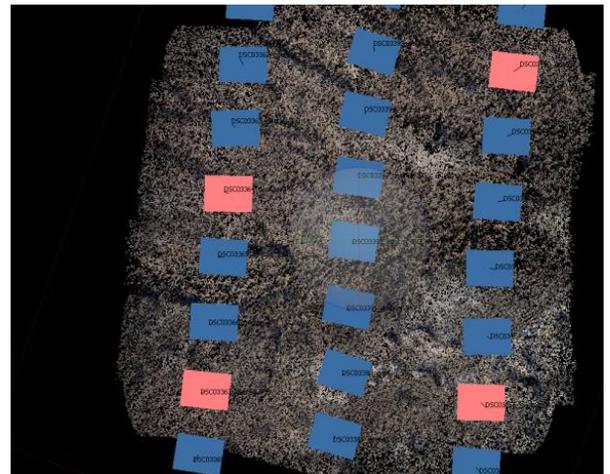

Place Markers (Adding Ground Control)

- Markers, or ground control points (surveyed on the site, or by selecting from original correct imagery (such as Google Earth)) can be added at this point to better improve the model and georeferencing accuracy of the final data outputs.


Placing Markers (Adding Ground Control)

Suggestions for ground control points:

- Dispersed evenly
- Generally at least 6-10 (10 is optimal according to PhotoScan)
 - At least 4 used in model (will not work with <3)
 - Extra GCP can be used for model validation
- < 0.5 m accuracy
- Large enough to locate in imagery

Identify a ground control point

There are a few methods for locating your ground control. If your ground control is standard (circular 12 bit, 16 bit, or 20 bit, a cross or a circle), you can locate them by clicking the Tools dropdown > Markers > Detect Markers. Note that this may identify many more ground control locations than actually exist.

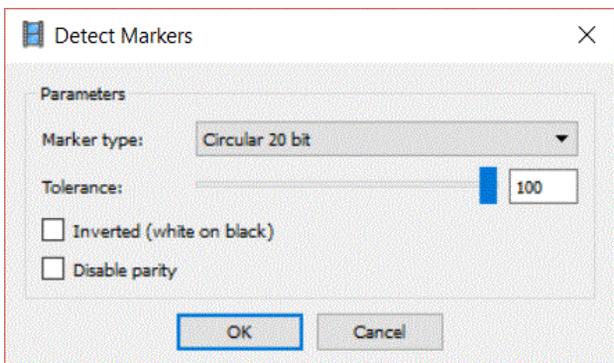

PhotoScan provides an easy way to print out standard markers. Under the Tools dropdown > Markers > Print Markers.

If the automated method does not work, another easy method for locating your ground control is to first import your coordinates into Google Earth to get an idea of where they are located. Then, generate a low resolution dense point cloud. From the dense point cloud, select points around the approximate area of your ground control, right click on them and choose "Filter Photos by Point". Look through those photos and see if your ground control is in fact there.

Create a marker in two images.

Once you have located an image with your ground control, you can right click on the ground control in the image and hit "Create Marker". You may now adjust the point to assure it is exactly where you took your measurement in the field. Repeat this with another image containing the same ground control point.

Adjust the markers that PhotoScan generates.


After you have identified and marked two instances of a single ground control point, PhotoScan will attempt to find the rest of the instances throughout your images. These will be represented by blue flags but will not be used as actual ground control locations until you have clicked on them to make them green.

Note: *If your ground control is out of focus in the image and you are unsure of where to put your marker, it might be better not to place a marker than to place one incorrectly!*

Repeat for all ground control locations.

Enter the coordinates of your ground control.

Now that you have gone through and put markers on all of your ground control, it is time to enter the coordinates of each of your points. Coordinates will be located under the Reference - Markers panel. You may type in the coordinates by hand or import a .txt file with the coordinates by clicking the “import” button on the top left of the Reference panel. The .txt file format should be, column 1: Name, column 2: X (longitude), column 3: Y (latitude), column 4: Z (elevation in m). Note: if you import the coordinates the name of your ground control point in PhotoScan must match the name in your coordinates .txt file. You may also perform this process backwards by importing the coordinates first and then locating the ground control on your model. The ground control coordinates must be converted to decimal degrees. **Make sure the coordinate system that you took your ground control measurements in is set properly in PhotoScan.** To do this click on the settings button on the Reference toolbar.

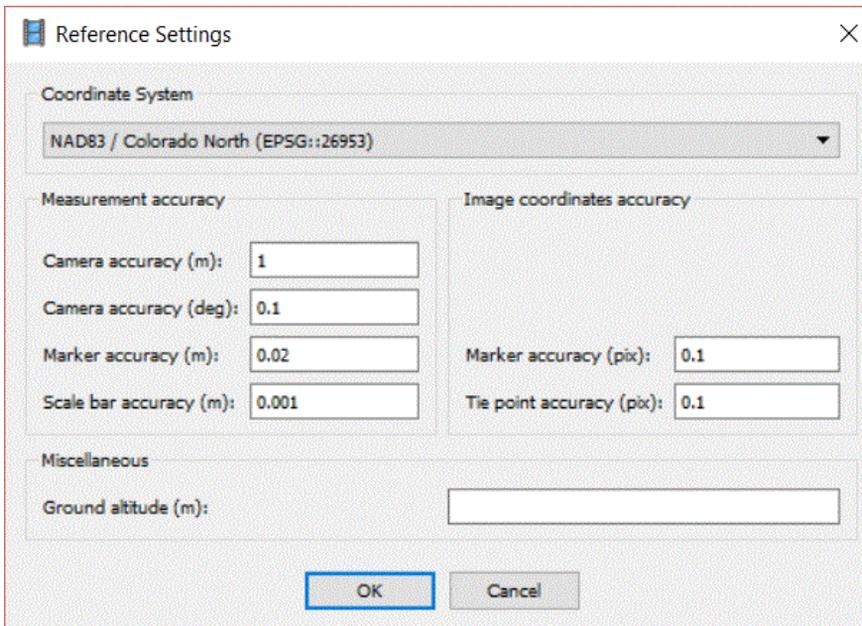



Uncheck the coordinates for the cameras if you have them.

Optimize the model and check for errors.


Once the coordinates are entered, you should optimize the model again and check for your error in meters and pixels next to your coordinates. If your error is more than expected, you may want to double check that you entered your coordinates correctly (assure that the latitude and longitude columns are not switched or values were not input incorrectly), and that you identified your ground control adequately.

Reprojection Error (Pixel Residual Errors)

- Select 'Edit' from the main menu...Gradual Selection...Reprojection Error (from the pulldown menu)... the goal is to reach a Level = 0.3 pixels. To do this, select no more than 10% of the points each time until a level of .3 or less pixels is obtained without any additional points selected to delete. Note: in the lower left-hand corner, try to stay less than 10% of the points selected ...OK.

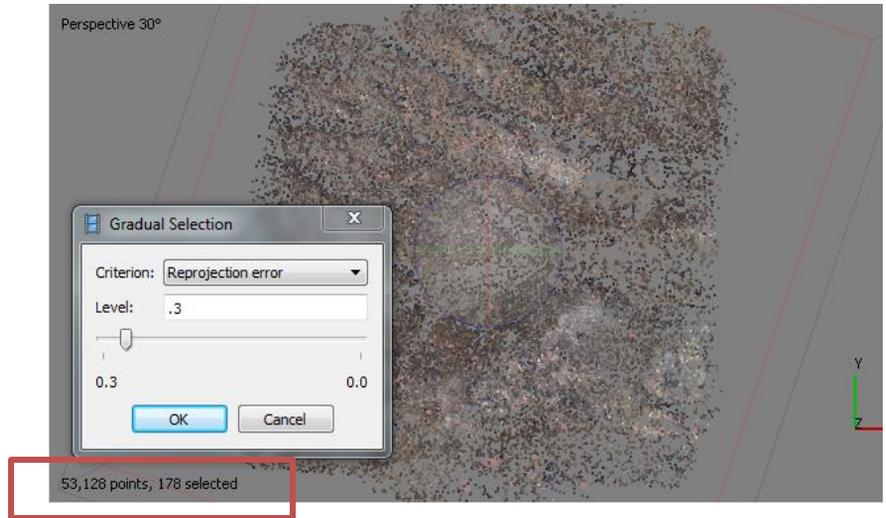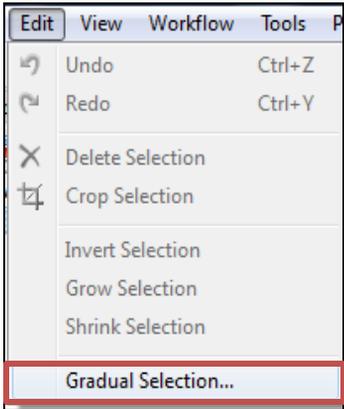

- Selected points will show up as pink. To delete those points, select the from the main menu. After deleting points, another optimization is needed with all the parameters checked on

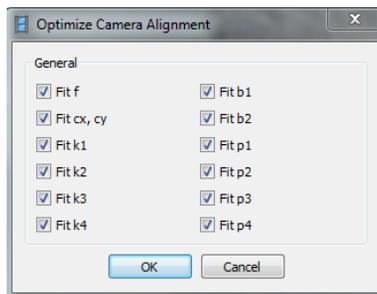

Cameras	Projections	Error (pix)	Error (m)
<input checked="" type="checkbox"/> DSC03452_geotag.JPG	4875	0.266	2.860600
<input checked="" type="checkbox"/> DSC03393_geotag.JPG	5654	0.274	4.637066
<input checked="" type="checkbox"/> DSC03456_geotag.JPG	3096	0.276	2.844922
<input checked="" type="checkbox"/> DSC03455_geotag.JPG	5582	0.277	49.846881
Total Error			3.767081

```


2017-03-21 21:25:29 Checking tie
point projections...
2017-03-21 21:25:30 Finished
processing in 0.337 sec (exit code
1)
2017-03-21 21:25:30 Optimizing
camera locations...
2017-03-21 21:25:30 adjusting:
xxxxxxxxxxxxxxxx 1.28768 -> 1.2875
2017-03-21 21:25:37 Coordinates
applied in 0 sec
2017-03-21 21:25:38 Finished
    
```

- The Reprojection Error procedure should be run until you reach Projection AccuracyLevel = .3 and no more points are selected.


5.) Build the Dense Point Cloud

Procedure Description: A dense point cloud can now be derived from the better estimated camera positions calculating several x,y,z points as well as assigning color values to accurately create the model.

- Workflow...Build Dense Cloud...(Note: Higher the quality the more intensive processing and time needed to derive. Depth filtering set to Aggressive is used for the most complex detail.)...OK

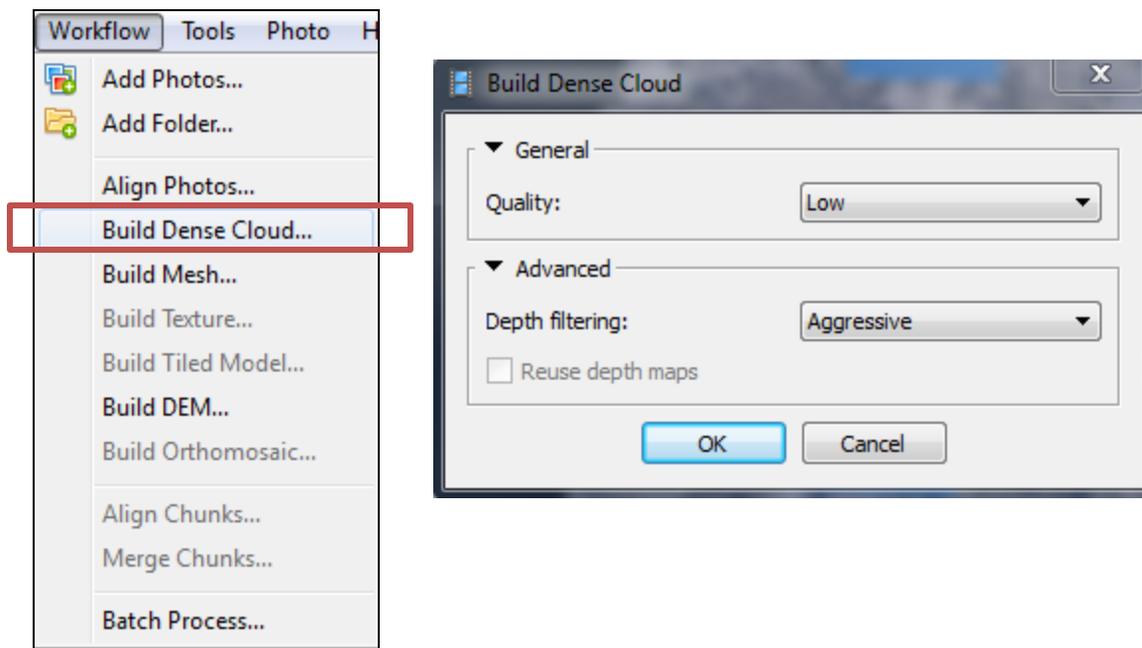



- Select the  icon on the main menu if the dense point cloud does not display (usually defaults to a sparse point cloud display).

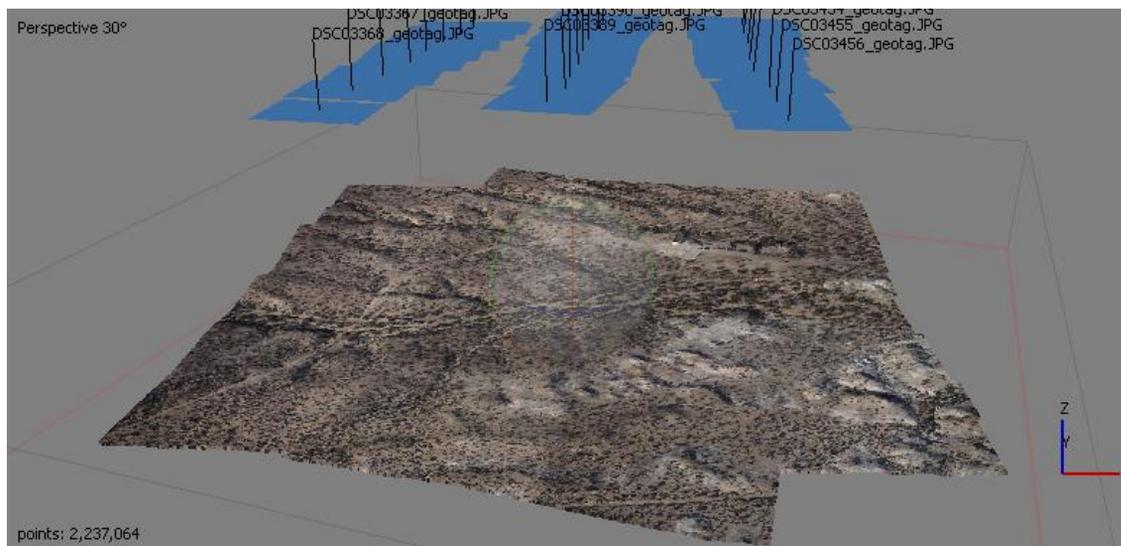


6.) Build Mesh

Procedure Description: From the dense point cloud, a polygon mesh model can be generated.

- Workflow...Build Mesh...OK
(Note: Surface type = Height Field for vertical photography, Arbitrary is used for oblique models)

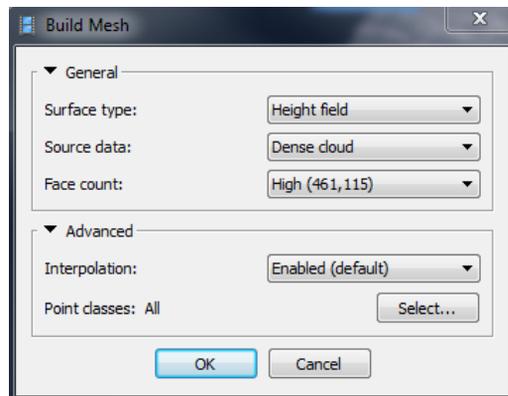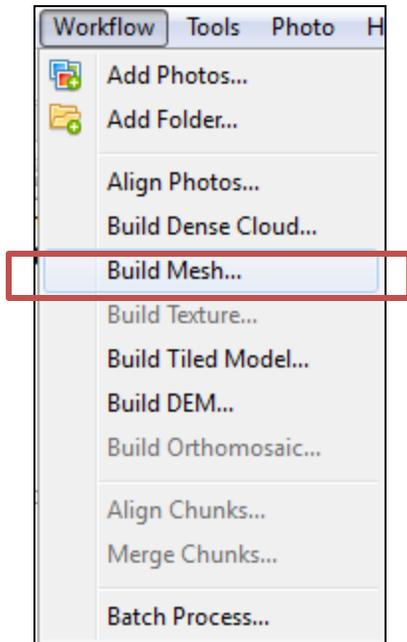



- Select the  icon on the main menu to display the mesh (shaded, solid or wireframe).

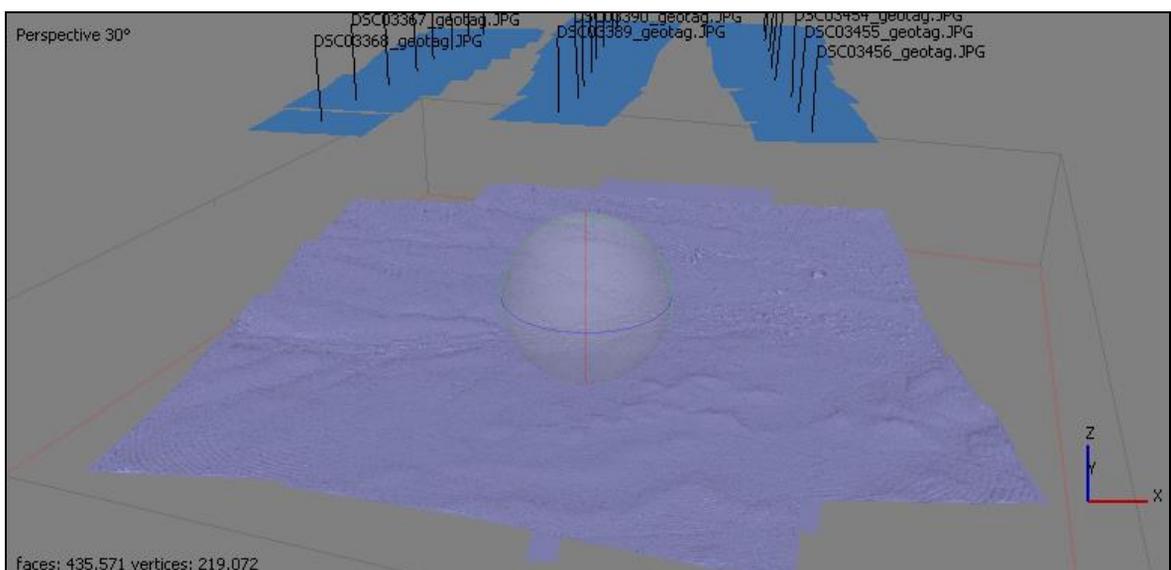

7.) Build Texture

Procedure Description: Texture in the form of image overlay can be generated to be able to inspect the model before exporting the orthophoto mosaic.

- Workflow...Build Texture...OK
(Note: If 'Enable color correction' is used, the time to generate the texture may be increased)

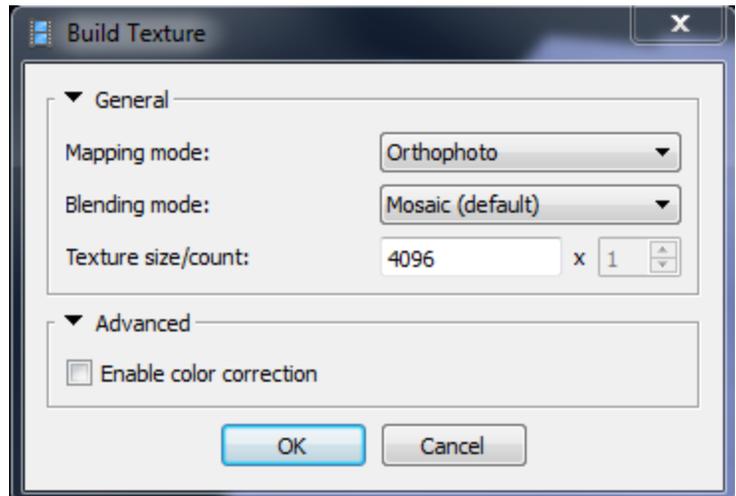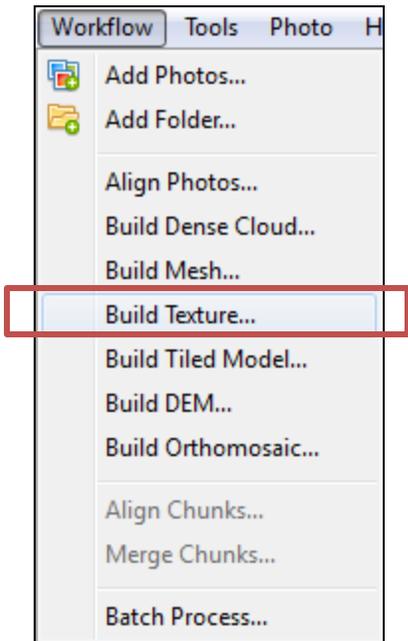



- Select the  icon on the main menu to display the orthophoto (texture).





8.) Build DEM

Procedure Description: A digital (surface) elevation model can be generated from the project model into a desired format with an assigned coordinate system and projection.

- PhotoScan will want you to save the project at this point. File...Save as...Filename.psx. Workflow...Build DEM...select the coordinate system of the output (defaults to the model setup)...OK. (Note: Source data can be either Dense Cloud or Mesh. Dense cloud is used for better accuracy.)

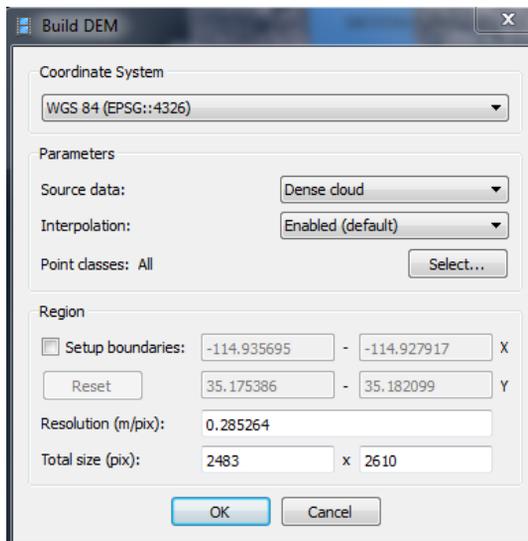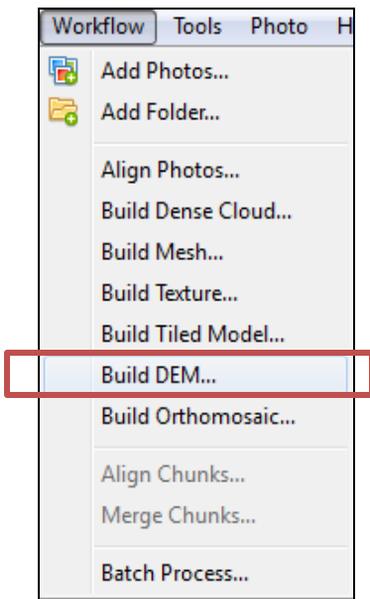



- After the DEM is generated it can be displayed in the Ortho Display by double clicking the layer in the Workspace Panel under the 'Chunk'.

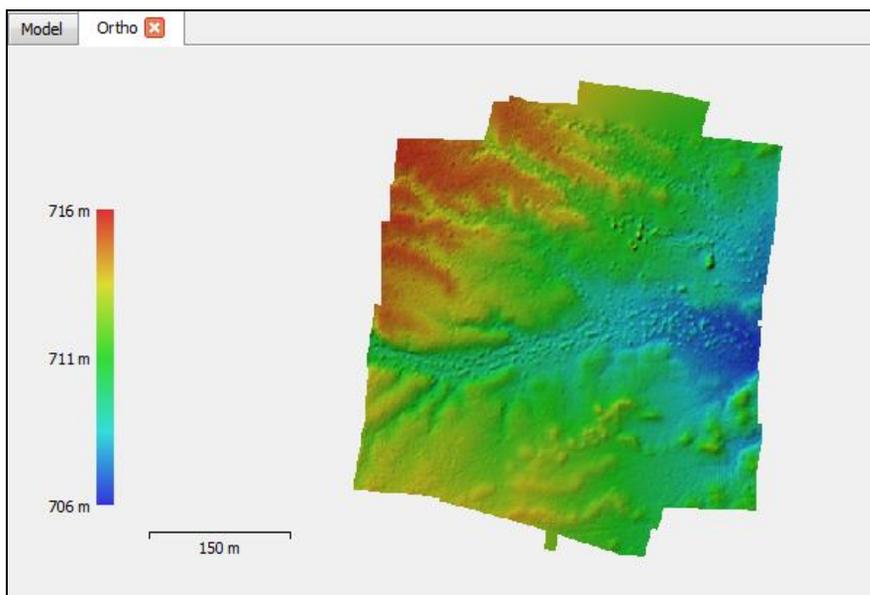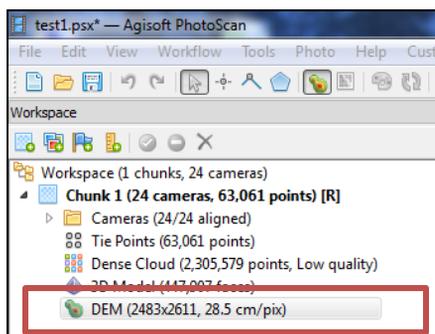


9.) Build Orthomosaic

Procedure Description: A digital orthomosaic can be generated from the model into a desired format with an assigned coordinate system and projection.

- Workflow...Build Orthomosaic...OK
(Note: Reprojecting the image can be done at this point or during the export)

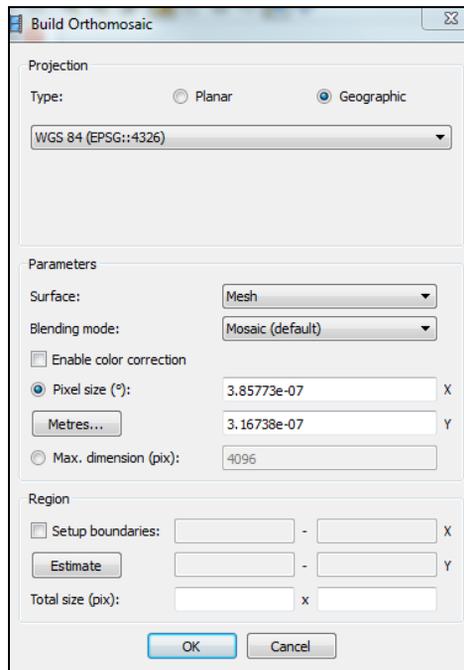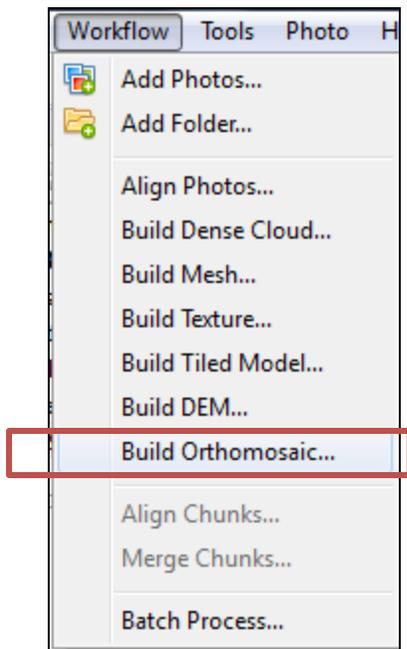



- After the Orthomosaic is generated it can be displayed in the Ortho Display by double clicking the layer in the Workspace Panel under the 'Chunk'.

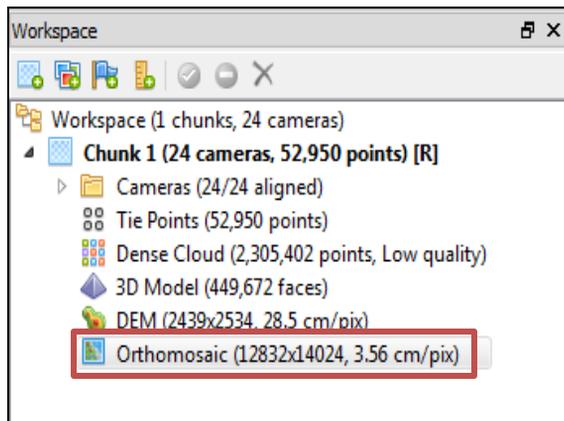


10.) Exporting Products

Procedure Description: The various products generated through the modeling process can all be exported into standard formats for use in display or GIS data layers.


- From the Main Menu Select File...Export (Points, Model, Orthomosaic or DEM). Another option is to export by right clicking on the layer under the 'Chunk' in the Workspace Panel.

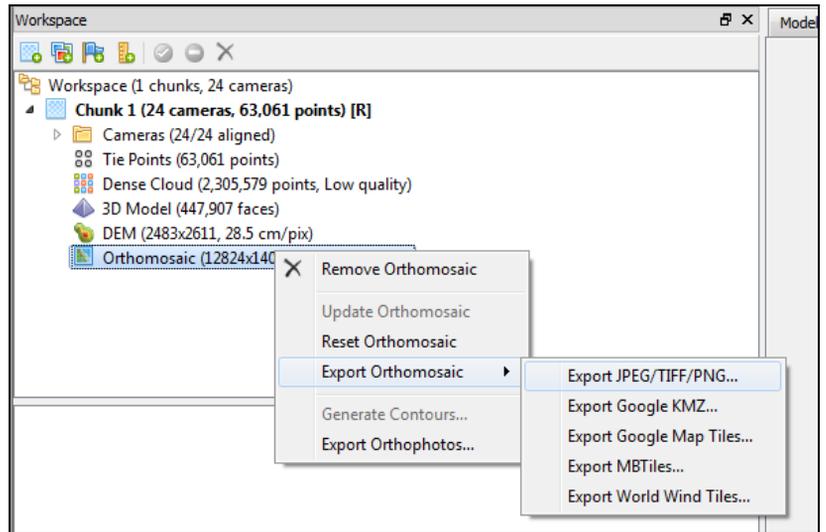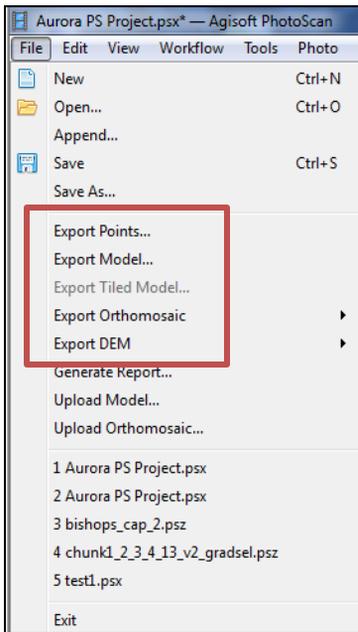


- Exported layers can then be used in standard GIS software (i.e.. Global Mapper below)

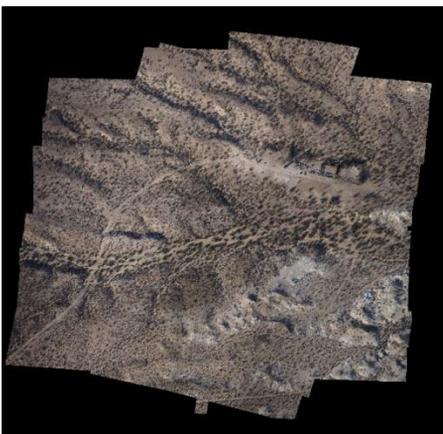

Orthophoto mosaic

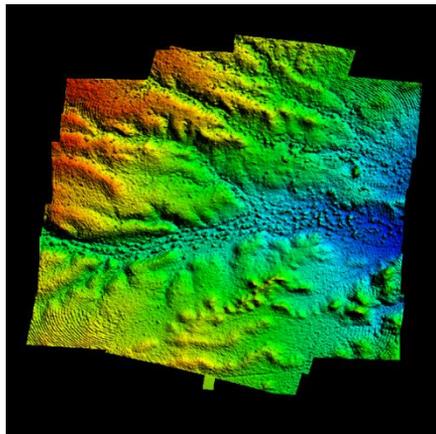

Digital Elevation Model

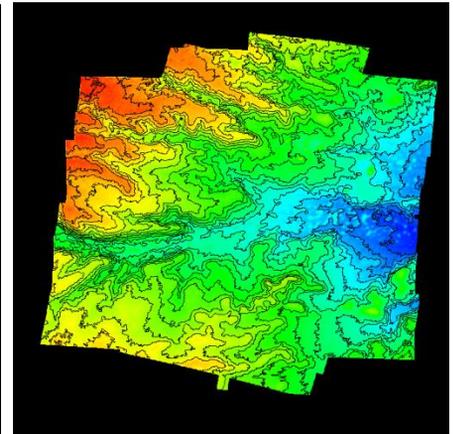


DEM with Contours


11.) Reports

Procedure Description: Generation of camera calibration and photogrammetric reports.

- From the Main Menu Select Tools ... Camera Calibration ... Right Click for a Distortion Plot of the camera after the adjustment.

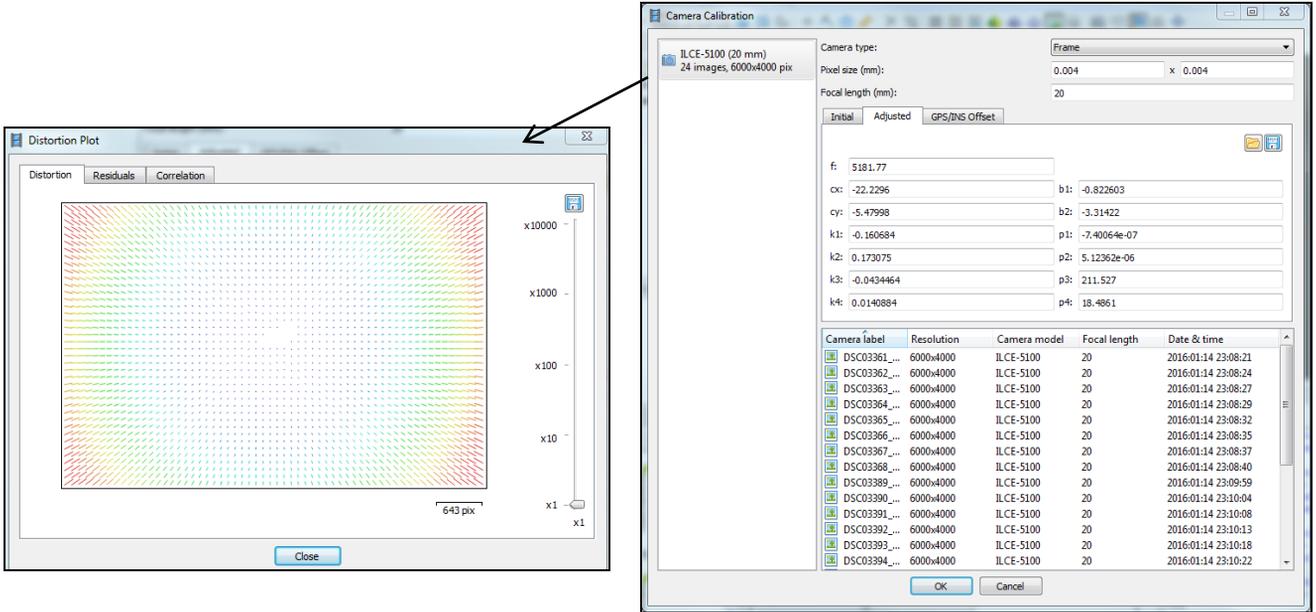

- From the Main Menu Select File ... Generate Report ... OK ... filename.pdf

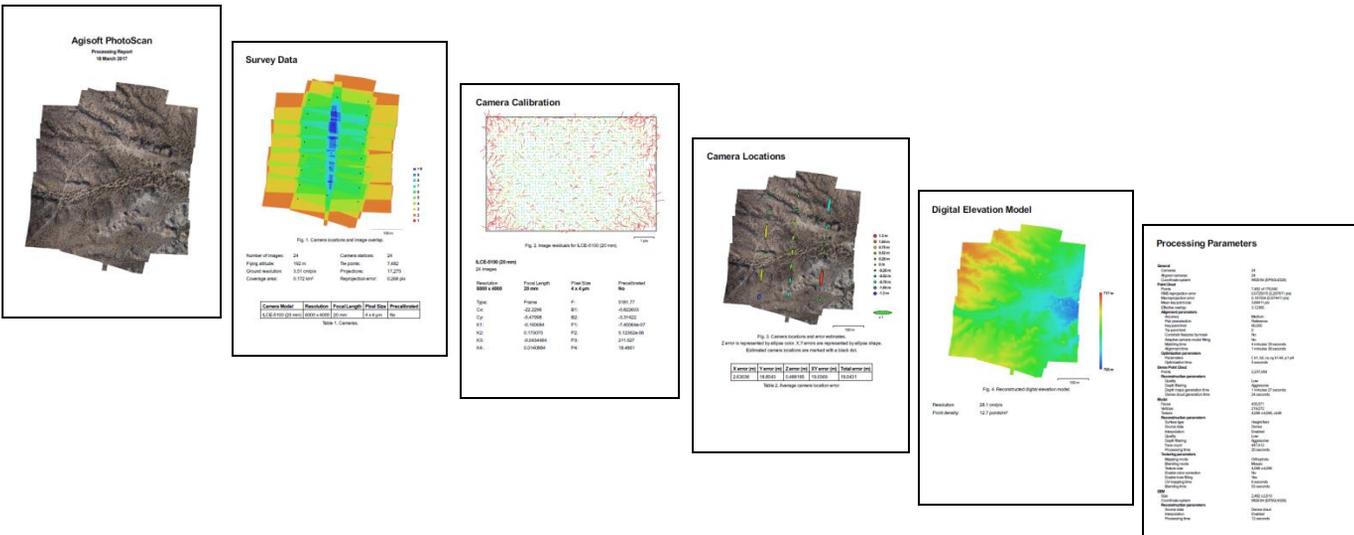

12.) Appendices

Unmanned Aircraft System Flight Planning

Camera	Sony A5100	
--------	------------	---

Camera Inputs:

FL (mm)	Image hgt (pix)	Sensor width (mm)	Sensor hgt (mm)	Pix Size (width)	Pix Size (hgt)
20	4000	23.50	15.60	0.0039	0.0039

Calculations:

	GSD width (cm)	GSD hgt (cm)	GSD width (inches)	GSD hgt (inches)	Photo width (ft)	Photo hgt (ft)
50 ft	0.30	0.30	0.12	0.12	58.8	39.2
100 ft	0.60	0.59	0.24	0.23	117.5	78.0
200 ft	1.19	1.19	0.47	0.47	235.0	156.0
300 ft	1.79	1.78	0.71	0.70	352.5	234.0
400 ft	2.39	2.38	0.94	0.94	470.0	312.0
500 ft	2.98	2.97	1.18	1.17	587.5	390.0
600 ft	3.58	3.57	1.41	1.40	705.0	468.0
700 ft	4.18	4.16	1.65	1.64	822.5	546.0
800 ft	4.78	4.75	1.88	1.87	940.0	624.0
900 ft	5.37	5.35	2.12	2.11	1057.5	702.0
1000 ft	5.97	5.94	2.35	2.34	1175.0	780.0

Flight Planning:

	Speed (mph)	Speed (kts)	Flt Hgt (ft.-AGL)	Dist. Side Transect (ft)	Dist. Forelap (ft)	Cam. Interv. (s)	Side trans (m)
50 ft			50	29.4	13.3	0.91	8.9335
100 ft	10	9	100	58.8	26.5	1.81	17.9070
200 ft			200	117.5	53.0	3.62	35.8140
300 ft			300	176.3	79.6	5.42	53.7210
400 ft			400	235.0	106.1	7.23	71.6280
500 ft			500	293.8	132.6	9.04	89.5350
600 ft			600	352.5	159.1	10.85	107.4420
700 ft			700	411.3	185.6	12.65	125.3490
800 ft			800	470.0	212.2	14.46	143.2560
900 ft			900	528.8	238.7	16.27	161.1630
1000 ft			1000	587.5	265.2	18.08	179.0700

Notes:
 Formula: GSD = Pix Size * Flight Height / Focal Lgh
 Formula: Photo Footprint = Img pix * GSD
 Dist. Between Transects for 50% sidelap:
 Dist. Between Photo Interval for 66% sidelap:
 1 mph = 1.467 feet per second



3/24/2017